

TO BE THE FOREUNNER OF  
LED DISPLAY INDUSTRY



D SERIES

## Lightweight Rental Display

# D SERIES

Lightweight Rental Display



Light Weight



Fast Assembly



Anti-Damage Design



Mixed Splicing



Standardization



Tidy Cabinet Design



Shenzhen Dicolor Group Co., Ltd


Address: No.13 Huiye Road, Tangjia Community, Fenghuang Street,  
Guangming District, Shenzhen, China  
Tel: +86-755-3369 1736 E-mail: inquiry@dicolor.cn  
Website: www.dicolor.cn / www.dicolorled.com



02.2023

Shenzhen Dicolor Group Co., Ltd

## Appearance

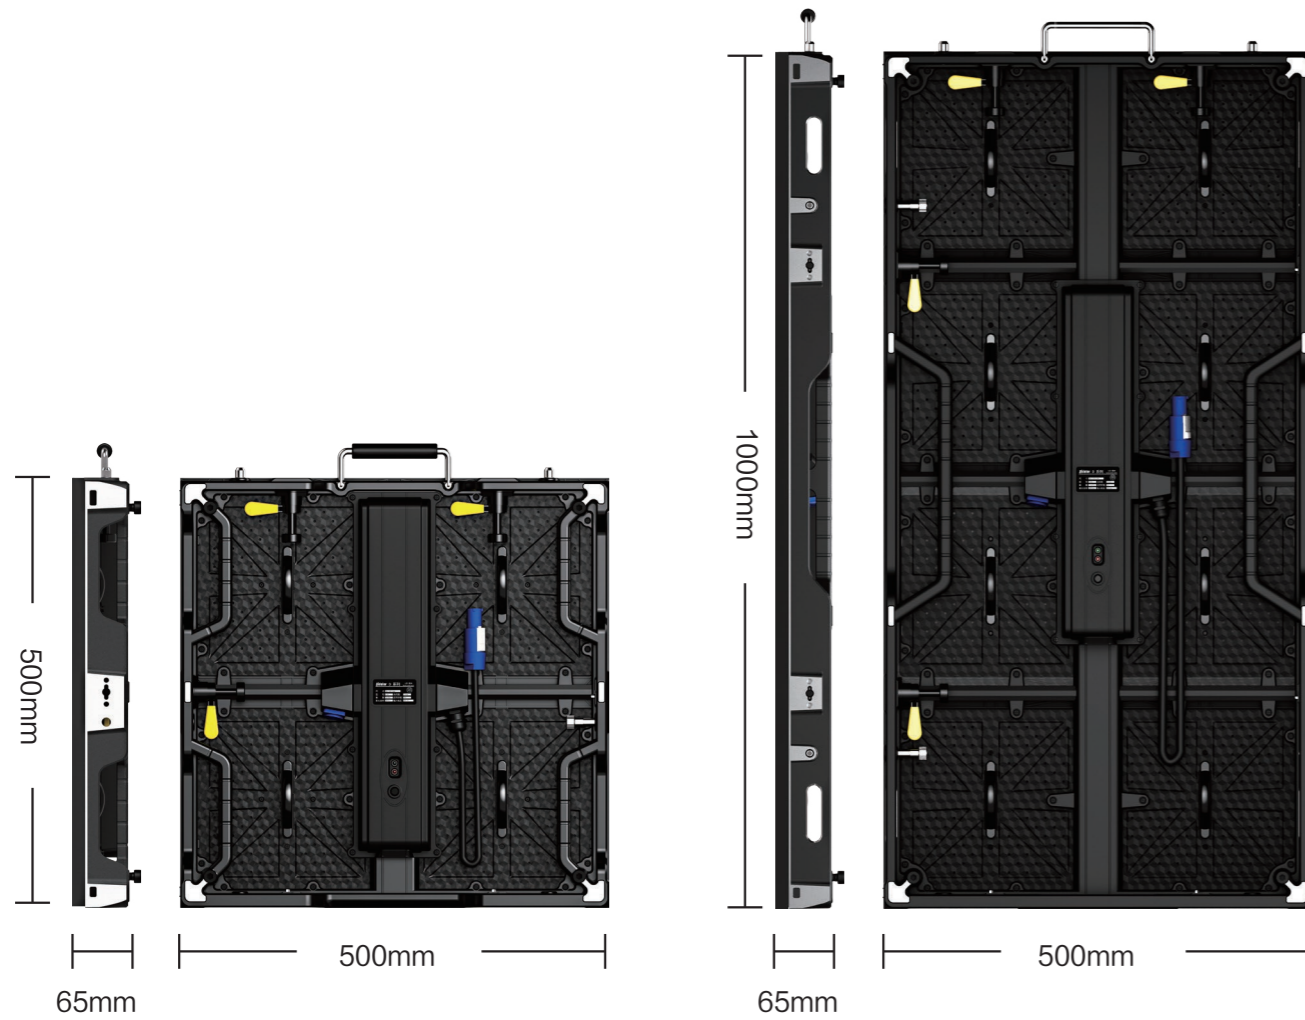

## Product specifications

| Product                         | D-261 (indoor) | D-291 (indoor) | D-391 (indoor)            | D-390 (outdoor)           | D-480 (outdoor)           |
|---------------------------------|----------------|----------------|---------------------------|---------------------------|---------------------------|
| Pixel Pitch (mm)                | 2.604          | 2.97           | 3.91                      | 3.91                      | 4.81                      |
| Cabinet size (WxH/mm)           | 500×500×65     | 500×500×65     | 500×500×65<br>500×1000×65 | 500×500×67<br>500×1000×67 | 500×500×67<br>500×1000×67 |
| Cabinet Resolution              | 192x192        | 168x168        | 128x128<br>128x256        | 128x128<br>128x256        | 104x104<br>104x208        |
| Cabinet Weight (Kg)             | 6.5            | 6.5            | 6.5 / 10                  | 7 / 11.5                  | 7 / 11.5                  |
| Brightness (Nits)               | 800            | 800            | 800                       | 3500                      | 3500                      |
| Refresh Rate (Hz)               | ≥3840          | ≥3840          | ≥3840                     | ≥3840                     | ≥3840                     |
| Gray Scale (Bit)                | 14             | 14             | 14                        | 14                        | 14                        |
| IP Rating (Front/Rear)          | IP40/IP21      | IP40/IP21      | IP40/IP21                 | IP65/IP54                 | IP65/IP54                 |
| Max./Avg Power Consumption(W/m) | 480/160        | 424/141        | 432/144                   | 548/183                   | 568/189                   |


## Extremely light weight and thin thickness

Thickness less than 65mm, weight in 10kg, ahead of other suppliers.




## Quick installation

the unique cabinet design highly improves the efficiency of installation and maintenance.

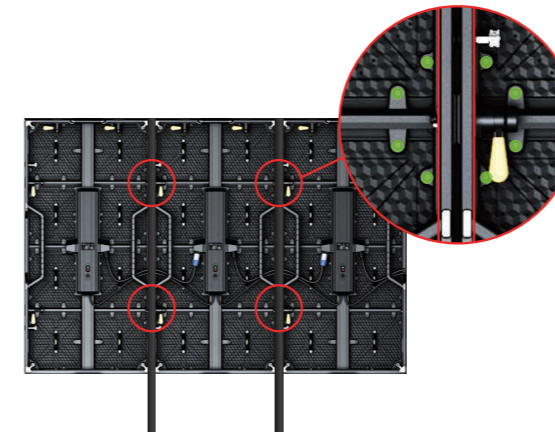


## Anti - bump welding plate design

Anti-bump welding plate design, even if the LED lamps were knocked off, the welding plate will not be damaged, greatly improving the LED lamp maintainability.

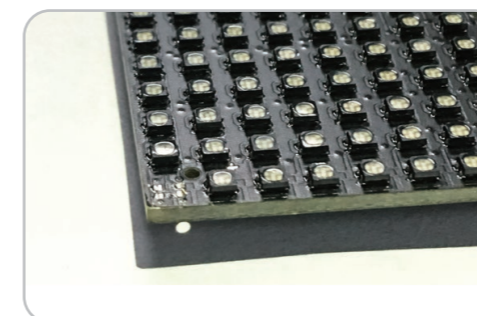


## Mixed splicing

500x500mm and 500x1000mm cabinets can be easily spliced up and down, greatly satisfying different needs of assembling.

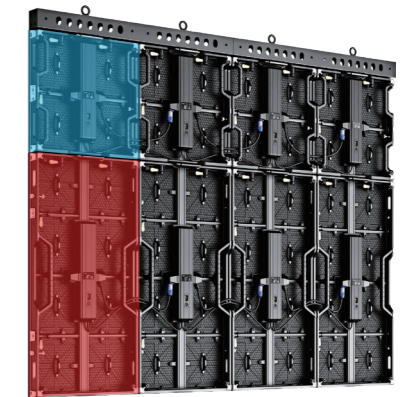


## Anti-bump design

Cabinet anti-bump design, effective protection of the module from damage, transport ation and handling more secure.

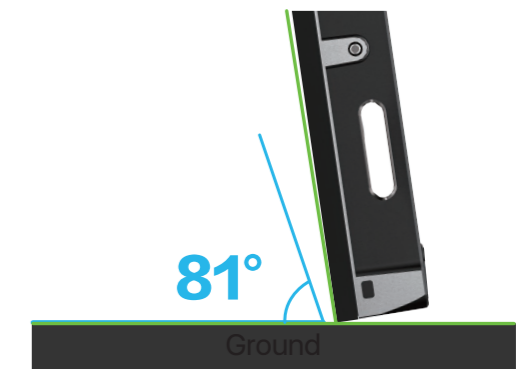

## Quick installation

The left and right sides of the cabinet to retain the convex and concave step positioning to prevent the dislocation of the cabinets front and back during the installation; cabinet right and left fast positioning pin design to prevent the dislocation of the cabinets up and down during the installation.

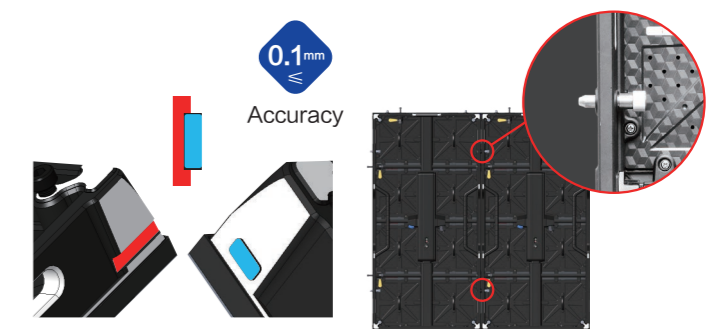

Convex and concave step positioning

Fast positioning pin